



PurGuard360®

Antibacterial Handheld Shower System



PurGuard360®

15cm diameter

Antibacterial Handheld Shower System

Service Life: up to 5 months (150 days)

Model Number: QF10-202



PURGUARD360® (15 cm) is an advanced antibacterial handheld shower system designed to reduce exposure to Legionella pneumophila, NTM, E.coli, Salmonella and other waterborne pathogens at the point of use. With high-performance ultrafiltration technology tested to ASTM F838-2020, it achieves up to 99.99999999% (Log 10) bacteria reduction under controlled laboratory conditions and offers three operating positions: Rain, Normal, and Steam.

Technical Characteristics

Manufacturing and Regulatory Status Manufactured in an FDA-registered medical device establishment and a U.S. EPA FIFRA-registered facility

Material Medical-grade ABS

Pore Size / Technology 0.08 µm | Ultrafiltration POU

Bacteria Reduction Log 10 (99.99999999%)
ASTM F838-2020 tested

Service Life Up to 150 days (5 months)

Measurements (Nominal) Width: 150.5mm (5.93in)
Length: 330.5mm (13in)

Weight (Nominal) 353 g (12.45 oz)

Operating positions 3 - Rain, Normal, Steam.

Clean water flow rate

Maintains shower flow with no loss in water output

Max Operating Pressure

Continuous up to 5 bar / 72.5 psi, short-term peak \leq 20 bar / 290 psi

Operating Temperature

Continuous up to 140 °F (60 °C), short-term peak up to 158 °F (70°C)






Disinfection Compatibility

External surfaces may be cleaned using common sanitizing agents


EPA WaterSense®

EPA WaterSense® Special Edition certified

Advantages

-  Higher verified bacteria reduction
-  Longer service life (up to 150 days)
-  Ultrafiltration technology
-  Medical-grade housing material
-  Stronger U.S. regulatory alignment

Regulatory Certifications

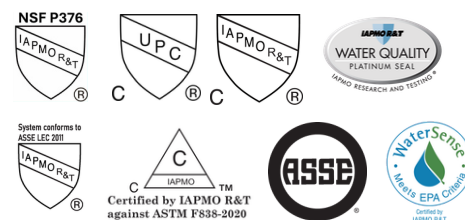

Disclaimer

Service life is estimated and may vary based on source water quality, usage conditions, and operating environment. Performance cannot be guaranteed. Product specifications are derived from controlled laboratory testing and are provided for reference only. Actual results may differ in real-world applications.